

NI2400/NI816/NI4866 DATALOGGER

NI2400/NI816/NI4866



**8/16/24 CHANNEL ETHERNET DATA LOGGER
with Embedded Web Server**


DATASHEET

Rev. 08 del 08/10/2018
Redatto da R&D
Approvato da MKT

The logo for NEXT industries MILANO, featuring a stylized grid of dots to the left of the text 'NEXT industries MILANO'.

	NI4866	NI816	NI2400
Ethernet	Y	Y	Y
Relay Output (30V 1A)	7	1	1
Digital Input (24V 10mA)	2	2	2
Analog Input Number	4-8	8-16	24
Internal Temperature Sensor	Y	Y	Y
Voltage	Y	Y	Y
Current	Y	Y	Y
mV/V	Y	Y	Y
PT100	N/Y**	N/Y**	Y
NTC	Y	Y	Y
Vibrating Wire***	N/Y**	N/Y**	Y
Internal CJC Sensor	Y	N	Y
Thermocouple	Y	N	Y
Switchable Power Supply (Selectable by Software: 24V, 20V, 10V, 5V)	N/Y**	N/Y**	Y
RS485	2	2	2
Power Supply RS485	Y	Y	Y
Smart MUX*	N	N	N
RS232	Y	Y	Y
Display	128x64 px	128x64 px	128x64 px
USB HOST	Y	Y	Y
Analog Expansion with Multiplexer	N	Y	Y
DI/DO Expansion	6 IN/ 6 OUT	-	-
Memory	2GB	2GB	2GB
Software Web Server	Y	Y	Y
Cloud Dashboard Management Option	Y	Y	Y
Weight	980g		
Dimensions (L x W x H)	231 x 138 x 117 mm		
Material	Plastic and Metal		
Wiring	Screws clamp termination block up to 1,3mm2 (16AWG)		
Calibration	Recommended every 1 year		
Operating Voltage	10 to 30V DC (reverse polarity protected)		
<small>*Smart MUX: Allows to connect an NI100 to an NI10 and Multiplexers to read Vibrating Wire (with NTC) sensors. Up to 16 Multiplexers and 16 NI10, for a total of 384 sensors. **Depending on model ***Vibrating Wire reading is under development even if User Manual is ready for this feature.</small>			

SPECIFICATIONS NI2400

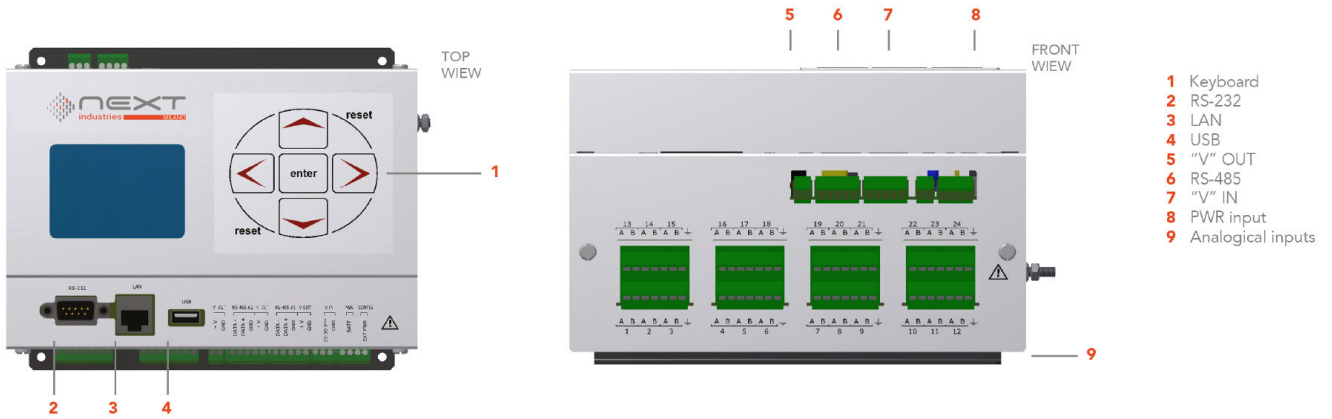

- Webserver on board
- 24 Differential Analog Input Channels
- Measures: Thermocouples, PT100 RTD, NTC Thermistor, mV, mA, mV/V
- View Data in real Time or Store to 2 GB Internal Memory
- GPRS Modem available
- 0.01% FS Accuracy
- Expandable up to 384 channels with multiplexers
- Ethernet, RS485, RS232 and USB Connections
- SMS and e-mail Alerts

PHYSICAL CHARACTERISTICS

Weight	980 g (2.16 lb)
Dimensions (L x W x H)	231 L x 138 W x 117 mm H (9.09 x 5.43 x 4.61")
Material	Plastic and metal
Wiring	Removable screw terminal connectors

CPU AND MEMORY

Processor	ARM Cortex-M3 MCU with 1 MB Flash, 120 MHz CPU, ART Accelerator, Ethernet
RAM Memory	1 Mbyte RAM
Mass storage	2 GB SD card for data (about 5 Mega data points) and Web pages
Clock accuracy	High precision RTC (real time clock with battery back-up) temperature compensated
On-board sensors	Temperature (accuracy $\pm 1\%$), measured inside the datalogger

ANALOG INPUTS

Number of Inputs: 24 differential analog inputs, individually configured. Channel expansion provided by multiplexers. There are 8 terminal blocks (each terminal block can handle up to 3 sensors). NI2400 is designed to work with 2 to 6-wire sensors. You can connect 2-wire sensors on each channel and read 24 sensors, or 4-wire sensor and read 12 channels. The system will order sensors depending on how many wires they use, placing 6 wires sensors first, 4 wires in the middle, and 2 wires last. Once software configuration is done, a click on "Wiring scheme" button on the web interface near the sensors will show how to physically connect the chosen sensor to the block. It shows "relative" position, so if you start connecting sensors from the first you will not have to leave "unused" positions (except for the ground connection of every block, if not used).

Multiplexers are needed if the total "wires" from sensors exceeds the 48 provided by NI2400.

Analog Measurements Measurement Rate	Maximum Speed	Standard Speed
Analog Initialization ($\pm 10V$ range)	1.70 sec	7.10 sec
Instrument Warm-Up	Depends on sensor configuration	
Measurement ($\pm 10V$ range)	80 ms	1.57 sec
Accuracy:	0.13 %FS	0.01 %FS (0.1%FS for PT100 and NTC)
ADC:	<p>Times indicated are not valid for vibrating wire measures</p> <p>Init analog phase is made only once before measurement cycle</p> <p>24-bit (22 true bit) differential analog-to-digital converters, 5SPS to 1000SPS, 0-24 average function, auto-calibration and auto-range</p>	

ANALOG INPUT TYPES

Current Loop (2 Wires)	0 to 25 mA range; power supply: 24/10 Vdc, external
Transmitter (3-4 Wires)	0 to 25 mA range; power supply: 24/10 Vdc, external
Voltage (4 Wires)	± 10 mV, ± 100 mV, $\pm 1V$, $\pm 10V$ ranges; power supply: 24/20/10/5Vdc, external
Servo Inclinator	$\pm 5V$ range; power supply: ± 12 Vdc (dual), external
Wheatstone Bridge (6 Wires, With Sensing)	$\pm 10mV/V$ range; power supply: 10/5 Vdc, external (max 10 Vdc)
Minimum bridge resistance	200 Ω ; power supply: 10/5 Vdc, external (max 10 Vdc)
Potentiometer	$\pm 2.5V$ range; power supply: 10/5 Vdc

THERMOCOUPLE (LOGGER @ 25°C AMBIENT TEMPERATURE)		
TC TYPE	RANGE	ERROR
TC-K	From -200 °C to 1370°C	±1,24 °C
TC-B	From 600 °C to 1820 °C	±1,22 °C
TC-J	From -200 °C to 1200 °C	±1,04 °C
TC-T	From -200 °C to 400 °C	±1,99 °C
TC-E	From -200 °C to 1000 °C	±0,93 °C
TC-R	From -20 °C to 1760 °C	±1,64 °C
TC-N	From -260°C to 1300°C	±1,24 °C
TC-S	From -20 °C to 1760 °C	±1,64 °C

ANALOG MEASUREMENTS	
RTD Input	Platinum (Pt100/200/500/1000) RTD: range -195 to 847°C (-319 to 1556°F); maximum error $\pm 0,17\%$ FS; power supply: 1.2 mA
Thermistor (3000 Ω@25°C NTC)	range -50 to 0°C (-58 to 32°F) maximum error $\pm 2^\circ\text{C}$ ($\pm 3,6^\circ\text{F}$); range -0 to 150°C (32 to 302°F) maximum error $\pm 1^\circ\text{C}$ ($\pm 1,8^\circ\text{F}$); power supply: 0.05 mA /0.1 mA/1.2 mA
USB Device	USB 2.0 full speed 5V, max 500mA, USB pendrive only
Reading Resolution	1 μA at FS for 20 mA range; 1 μV at FS for ± 10 mV range; 10 μV at FS for ± 100 mV range; 100 μV at FS for ± 1 V range; 1 mV at FS for ± 10 V range; 0.1 $^\circ\text{C}$ for Pt100 RTD; 0.1 $^\circ\text{C}$ for NTC thermistor; 0.1 Hz for 6000 Hz range; 0.001 mV/V at FS for ± 10 mV/V (Wheatstone bridge)
Measurement Accuracy	0.01% mV/mA FS (0.1% FS for Pt100 and NTC) - with Standard Measurement 0.13% mV/mA FS - with Max Speed Measurement Temperature Drift: < 10 ppm/ $^\circ\text{C}$, range -30 to 70°C Input Noise Voltage: 5.42 μV pp Input Limits : $\pm 12\text{V}$ DC Common Mode Rejection: >105 dB Normal Mode Rejection: >90 dB Input Impedance: 20 M Ω typical
Switched Output Power Supply	The voltage 'V OUT' is switched on and off under program control. V OUT is the unregulated input power supply 'V IN' (2 A)

DIGITAL I/O

Digital Output One relay output (for alarm, etc.): volt-free closure (low voltage 30V, 2A)

Digital Input: Two opto-isolated digital inputs
 Max Input Voltage: 24V (max current: 10mA)
 Min Input Voltage: 5V (max current: 2mA)
 Measurement Rate (MR): max frequency 1 kHz
 Accuracy: 0.1 Hz

PROTECTIONS

Electro-Mechanical Relays for Measuring Each Channel:
 Electrical Endurance: min 2 x 10⁵ operations
 Mechanical Endurance: 100 x 10⁶ operations.
 Circuit Protection (Gas Discharge Tubes):
 DC Breakdown Voltage (@100V/s): 75V
 Tolerance of DCBV: ± 20%
 Impulse Breakdown Voltage (@100v/μs): 250V
 Impulse Breakdown Voltage (@1kv/μs): 525V
 Overvoltage and Reverse Polarity Protection
 Short Circuit Protection on Every Output

INTERFACES	
Display & Keyboard	Small backlight graphic LCD 128 x 64 dpi with membrane keyboard for the minimal local management without the PC. Keyboard for starting a data acquisition scan, sequential display of the last stored readings for each channel (sensor ID, converted unit reading, unit of measure), device status, data download and firmware/Web pages update by USB pen drive, safe mode (back-up/format/restore internal SD card).
LAN Ethernet Iso- lated	10/100 Mbps, RJ45
RS232	9-pin, DE9: DCE port for optional GSM/GPRS modem connection Baud Rates: selectable from 9600 bps to 115.2 kbps Default Format: 8 data bits; 1 stop bits; no parity
USB	USB 2.0 pen drive only (FAT 32), 5 V 200 mA
RS485#1 Opto-Isolated	Connection: 5 screw clamp port for max. No.254 Modbus RS485 digital bus sensors Communication Interface: RS485 Communication Protocol: MODBUS RTU Voltage 'V OUT': Switched on and off under program control. V OUT is the unregulated input power supply 'V IN' (1 A). Power supply management: Always on or energy safe
RS485#2 Opto-Isolated	Connection: 5 screw clamp port for max. 16 multiplexer boards connection. Communication interface: RS485 Communication protocol: MODBUS RTU Voltage 'V OUT': Switched on and off under program control. V OUT is the unregulated input power supply 'V IN' (1 A). Every channel of each multiplexer board is completely independent.

SOFTWARE & FIRMWARE


- Web server on board (independent OS platform)
- Acquisition Time Interval: selectable from 1 second up to 1 week (depends on the number of channels acquired)
- FTP client to send data/alarms on an FTP server (SFTP not supported)
- MAIL to send data/alarms to max 5 email address (SMTPS / SSL not supported)
- SMS to send alarms to max 5 telephone numbers
- Data download (readings, logs) in .csv file (compatible with Microsoft Excel)
- Virtual channels management
- Languages: Italian, English and French

SYSTEM POWER REQUIREMENTS

Voltage (External Power Supply)	10 to 30 Vdc (reverse polarity protected)
External Rechargeable Batteries	12 Vdc nominal
Typical Current Drain (@12 Vdc, External Power Supply)	Sleep Mode(MAX): 315 μ A ON: 62 mA - ON with ethernet connected: 87 mA - ON with display ON: 115 mA ON with display ON and ethernet connected: 142 mA
Analog Initialization	115 mA
Measurement	123 mA (with 12 mA @ 24 V sensor consumption)

ENVIROMENTAL CONDITIONS	
Operating Temperature	-30 to 70°C (display -20 to 70°C)
Storage Temperature	-40 to 85°C (display -30 to 80°C)
Relative Humidity	80 %RH
Overvoltage Category	II
Pollution Degree	2
Sound Levels	< 74 dBA
Maximum Height of Use	3000 m (9800 ft)

SPECIFICATIONS NI816

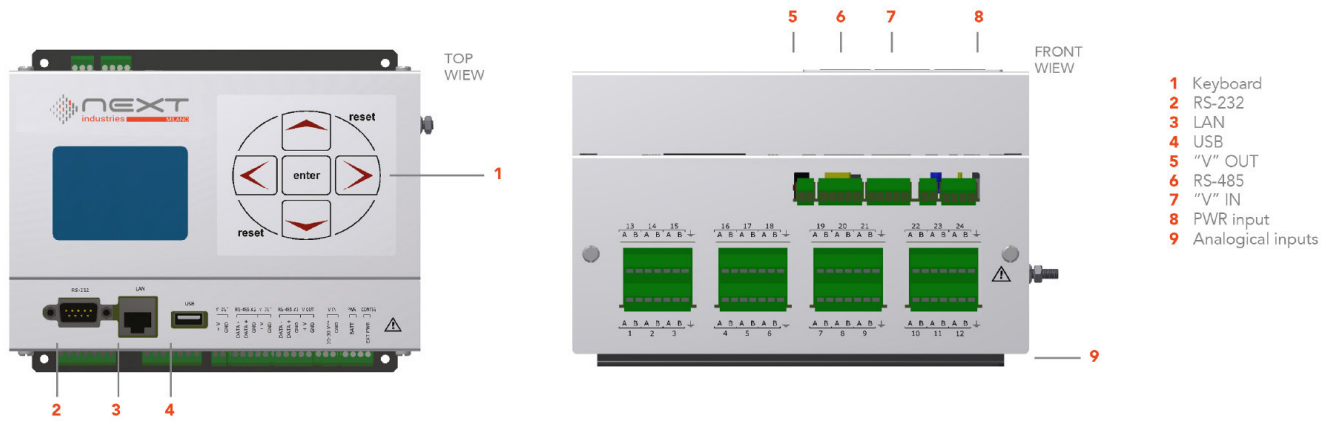

- Webserver on board
- Differential Analog Input Channels
- Measures: PT100 RTD, NTC Thermistor, mV, mA, mV/V
- View Data in real Time or Store to 2 GB Internal Memory
- GPRS Modem available
- 0.01% FS Accuracy
- Expandable up to 384 channels with multiplexers
- Ethernet, RS485, RS232 and USB Connections
- SMS and e-mail Alerts

PHYSICAL CHARACTERISTICS

Weight	980 g (2.16 lb)
Dimensions (L x W x H)	231 L x 138 W x 117 mm H (9.09 x 5.43 x 4.61")
Material	Plastic and metal
Wiring	Removable screw terminal connectors

CPU AND MEMORY

Processor	ARM Cortex-M3 MCU with 1 MB Flash, 120 MHz CPU, ART Accelerator, Ethernet
RAM Memory	1 Mbyte RAM
Mass storage	2 GB SD card for data (about 5 Mega data points) and Web pages
Clock accuracy	High precision RTC (real time clock with battery back-up) temperature compensated
On-board sensors	Temperature (accuracy $\pm 1\%$), measured inside the datalogger

ANALOG INPUTS

Number of Inputs: 8-16 differential analog inputs, individually configured. Channel expansion provided by multiplexers. There are 8 terminal blocks (each terminal block can handle up to 2 sensors). NI816 is designed to work with 2 to 6-wire sensors. Once software configuration is done, a click on "Wiring scheme" button on the web interface near the sensors will show how to physically connect the chosen sensor to the block.

Analog Measurements Measurement Rate	Maximum Speed	Standard Speed
Analog Initialization ($\pm 10V$ range)	1.70 sec	7.10 sec
Instrument Warm-Up	Depends on sensor configuration	
Measurement ($\pm 10V$ range)	80 ms	1.57 sec
Accuracy:	0.13 %FS	0.01 %FS (0.1%FS for PT100 and NTC)
ADC:	<p>Times indicated are not valid for vibrating wire measures</p> <p>Init analog phase is made only once before measurement cycle</p> <p>24-bit (22 true bit) differential analog-to-digital converters, 5SPS to 1000SPS, 0-24 average function, auto-calibration and auto-range</p>	

ANALOG INPUT TYPES (power supply depending on models)

Current Loop (2 Wires)	0 to 25 mA range; power supply: 24/10 Vdc, external
Transmitter (3-4 Wires)	0 to 25 mA range; power supply: 24/10 Vdc, external
Voltage (4 Wires)	± 10 mV, ± 100 mV, $\pm 1V$, $\pm 10V$ ranges; power supply: 24/20/10/5Vdc, external
Servo Inclinator	$\pm 5V$ range; power supply: ± 12 Vdc (dual), external
Wheatstone Bridge (6 Wires, With Sensing)	$\pm 10mV/V$ range; power supply: 10/5 Vdc, external (max 10 Vdc)
Minimum bridge resistance	200 Ω ; power supply: 10/5 Vdc, external (max 10 Vdc)
Potentiometer	$\pm 2.5V$ range; power supply: 10/5 Vdc

ANALOG MEASUREMENTS	
RTD Input (depending on models)	Platinum (Pt100/200/500/1000) RTD: range -195 to 847°C (-319 to 1556°F); maximum error $\pm 0,17\%$ FS; power supply: 1.2 mA
Thermistor (3000 Ω@25°C NTC)	range -50 to 0°C (-58 to 32°F) maximum error $\pm 2^\circ\text{C}$ ($\pm 3,6^\circ\text{F}$); range -0 to 150°C (32 to 302°F) maximum error $\pm 1^\circ\text{C}$ ($\pm 1,8^\circ\text{F}$); power supply: 0.05 mA /0.1 mA/1.2 mA
USB Device	USB 2.0 full speed 5V, max 500mA, USB pendrive only
Reading Resolution	1 μA at FS for 20 mA range; 1 μV at FS for ± 10 mV range; 10 μV at FS for ± 100 mV range; 100 μV at FS for ± 1 V range; 1 mV at FS for ± 10 V range; 0.1 $^\circ\text{C}$ for Pt100 RTD; 0.1 $^\circ\text{C}$ for NTC thermistor; 0.1 Hz for 6000 Hz range; 0.001 mV/V at FS for ± 10 mV/V (Wheatstone bridge)
Measurement Accuracy	0.01% mV/mA FS (0.1% FS for Pt100 and NTC) - with Standard Measurement 0.13% mV/mA FS - with Max Speed Measurement Temperature Drift: < 10 ppm/ $^\circ\text{C}$, range -30 to 70 $^\circ\text{C}$ Input Noise Voltage: 5.42 μV pp Input Limits : $\pm 12\text{V}$ DC Common Mode Rejection: >105 dB Normal Mode Rejection: >90 dB Input Impedance: 20 M Ω typical
Switched Output Power Supply	The voltage 'V OUT' is switched on and off under program control. V OUT is the unregulated input power supply 'V IN' (2 A)

DIGITAL I/O

Digital Output One relay output (for alarm, etc.): volt-free closure (low voltage 30V, 2A)

Digital Input:
 Two opto-isolated digital inputs
 Max Input Voltage: 24V (max current: 10mA)
 Min Input Voltage: 5V (max current: 2mA)
 Measurement Rate (MR): max frequency 1 kHz
 Accuracy: 0.1 Hz

PROTECTIONS

Electro-Mechanical Relays for Measuring Each Channel:
 Electrical Endurance: min 2 x 10⁵ operations
 Mechanical Endurance: 100 x 10⁶ operations.
 Circuit Protection (Gas Discharge Tubes):
 DC Breakdown Voltage (@100V/s): 75V
 Tolerance of DCBV: ± 20%
 Impulse Breakdown Voltage (@100v/μs): 250V
 Impulse Breakdown Voltage (@1kv/μs): 525V
 Overvoltage and Reverse Polarity Protection
 Short Circuit Protection on Every Output

INTERFACES	
Display & Keyboard	Small backlight graphic LCD 128 x 64 dpi with membrane keyboard for the minimal local management without the PC. Keyboard for starting a data acquisition scan, sequential display of the last stored readings for each channel (sensor ID, converted unit reading, unit of measure), device status, data download and firmware/Web pages update by USB pen drive, safe mode (back-up/format/restore internal SD card).
LAN Ethernet Isolated	10/100 Mbps, RJ45
RS232	9-pin, DE9: DCE port for optional GSM/GPRS modem connection Baud Rates: selectable from 9600 bps to 115.2 kbps Default Format: 8 data bits; 1 stop bits; no parity
USB	USB 2.0 pen drive only (FAT 32), 5 V 200 mA
RS485#1 Opto-Isolated	Connection: 5 screw clamp port for max. No.254 Modbus RS485 digital bus sensors Communication Interface: RS485 Communication Protocol: MODBUS RTU Voltage 'V OUT': Switched on and off under program control. V OUT is the unregulated input power supply 'V IN' (1 A). Power supply management: Always on or energy safe
RS485#2 Opto-Isolated	Connection: 5 screw clamp port for max. 16 multiplexer boards connection. Communication interface: RS485 Communication protocol: MODBUS RTU Voltage 'V OUT': Switched on and off under program control. V OUT is the unregulated input power supply 'V IN' (1 A). Every channel of each multiplexer board is completely independent.

SOFTWARE & FIRMWARE


- Web server on board (independent OS platform)
- Acquisition Time Interval: selectable from 1 second up to 1 week (depends on the number of channels acquired)
- FTP client to send data/alarms on an FTP server (SFTP not supported)
- MAIL to send data/alarms to max 5 email address (SMTPS / SSL not supported)
- SMS to send alarms to max 5 telephone numbers
- Data download (readings, logs) in .csv file (compatible with Microsoft Excel)
- Virtual channels management
- Languages: Italian, English and French

SYSTEM POWER REQUIREMENTS

Voltage (External Power Supply)	10 to 30 Vdc (reverse polarity protected)
External Rechargeable Batteries	12 Vdc nominal
Typical Current Drain (@12 Vdc, External Power Supply)	Sleep Mode(MAX): 315 μ A ON: 62 mA - ON with ethernet connected: 87 mA - ON with display ON: 115 mA ON with display ON and ethernet connected: 142 mA
Analog Initialization	115 mA
Measurement	123 mA (with 12 mA @ 24 V sensor consumption)

ENVIROMENTAL CONDITIONS	
Operating Temperature	-30 to 70°C (display -20 to 70°C)
Storage Temperature	-40 to 85°C (display -30 to 80°C)
Relative Humidity	80 %RH
Overvoltage Category	II
Pollution Degree	2
Sound Levels	< 74 dBA
Maximum Height of Use	3000 m (9800 ft)

SPECIFICATIONS NI4866

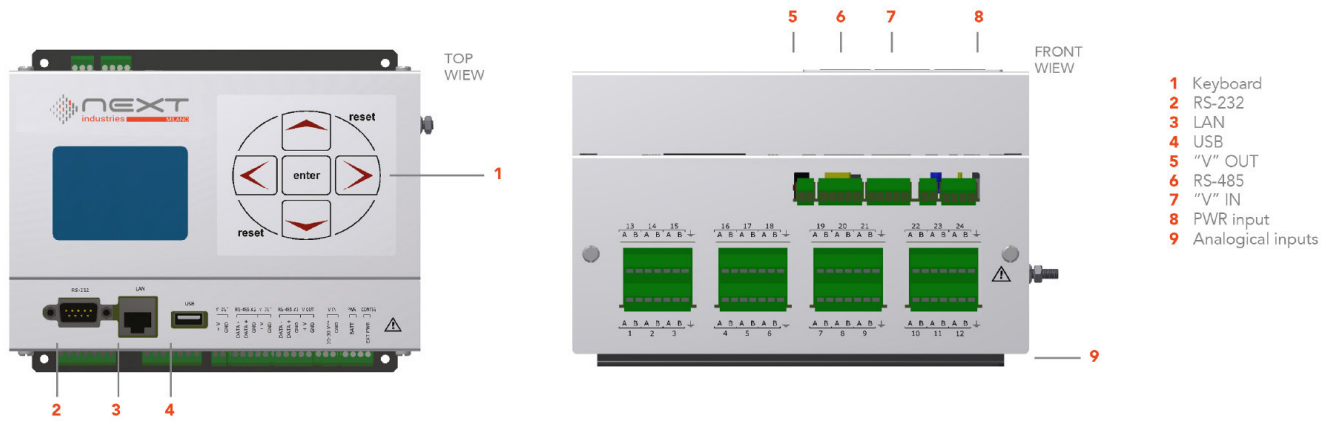

- Webserver on board
- 4-8 Differential Analog Input Channels
- Measures: Thermocouples, PT100 RTD, NTC Thermistor, mV, mA, mV/V
- View Data in real Time or Store to 2 GB Internal Memory
- GPRS Modem available
- 0.01% FS Accuracy
- 6 Digital Output and 6 Digital Input expansion integrated
- Ethernet, RS485, RS232 and USB Connections
- SMS and e-mail Alerts

PHYSICAL CHARACTERISTICS

Weight 980 g (2.16 lb)

Dimensions (L x W x H) 231 L x 138 W x 117 mm H (9.09 x 5.43 x 4.61")

Material Plastic and metal

Wiring Removable screw terminal connectors

CPU AND MEMORY

Processor	ARM Cortex-M3 MCU with 1 MB Flash, 120 MHz CPU, ART Accelerator, Ethernet
RAM Memory	1 Mbyte RAM
Mass storage	2 GB SD card for data (about 5 Mega data points) and Web pages
Clock accuracy	High precision RTC (real time clock with battery back-up) temperature compensated
On-board sensors	Temperature (accuracy $\pm 1\%$), measured inside the datalogger

ANALOG INPUTS

Number of Inputs: 4-8 differential analog inputs, individually configured. Channel expansion provided by multiplexers. There are 8 terminal blocks four can handle up to 2 sensors each, while two can handle up to 3 di each and two can handle (6 up to) do each. NI4866 is designed to work with 2 to 6-wire sensors. Once software configuration is done, a click on "Wiring scheme" button on the web interface near the sensors will show how to physically connect the chosen sensor to the block. 6 additional Digital Output and 6 additional Digital Input increase applications for the device.

Analog Measurements Measurement Rate	Maximum Speed	Standard Speed
Analog Initialization ($\pm 10V$ range)	1.70 sec	7.10 sec
Instrument Warm-Up	Depends on sensor configuration	
Measurement ($\pm 10V$ range)	80 ms	1.57 sec
Accuracy:	0.13 %FS	0.01 %FS (0.1%FS for PT100 and NTC)
	Times indicated are not valid for vibrating wire measures	
	Init analog phase is made only once before measurement cycle	
ADC:	24-bit (22 true bit) differential analog-to-digital converters, 5SPS to 1000SPS, 0-24 average function, auto-calibration and auto-range	

ANALOG INPUT TYPES (power supply depending on models)

Current Loop (2 Wires)	0 to 25 mA range; power supply: 24/10 Vdc, external
Transmitter (3-4 Wires)	0 to 25 mA range; power supply: 24/10 Vdc, external
Voltage (4 Wires)	± 10 mV, ± 100 mV, $\pm 1V$, $\pm 10V$ ranges; power supply: 24/20/10/5Vdc, external
Servo Inclinator	$\pm 5V$ range; power supply: ± 12 Vdc (dual), external
Wheatstone Bridge (6 Wires, With Sensing)	$\pm 10mV/V$ range; power supply: 10/5 Vdc, external (max 10 Vdc)
Minimum bridge resistance	200 Ω ; power supply: 10/5 Vdc, external (max 10 Vdc)
Potentiometer	$\pm 2.5V$ range; power supply: 10/5 Vdc

THERMOCOUPLE (LOGGER @ 25°C AMBIENT TEMPERATURE)

TC TYPE	RANGE	ERROR
TC-K	From -200 °C to 1370°C	±1,24 °C
TC-B	From 600 °C to 1820 °C	±1,22 °C
TC-J	From -200 °C to 1200 °C	±1,04 °C
TC-T	From -200 °C to 400 °C	±1,99 °C
TC-E	From -200 °C to 1000 °C	±0,93 °C
TC-R	From -20 °C to 1760 °C	±1,64 °C
TC-N	From -260°C to 1300°C	±1,24 °C
TC-S	From -20 °C to 1760 °C	±1,64 °C

ANALOG MEASUREMENTS	
RTD Input (depending on models)	Platinum (Pt100/200/500/1000) RTD: range -195 to 847°C (-319 to 1556°F); maximum error $\pm 0,17\%$ FS; power supply: 1.2 mA
Thermistor (3000 Ω@25°C NTC)	range -50 to 0°C (-58 to 32°F) maximum error $\pm 2^\circ\text{C}$ ($\pm 3,6^\circ\text{F}$); range -0 to 150°C (32 to 302°F) maximum error $\pm 1^\circ\text{C}$ ($\pm 1,8^\circ\text{F}$); power supply: 0.05 mA /0.1 mA/1.2 mA
USB Device	USB 2.0 full speed 5V, max 500mA, USB pendrive only
Reading Resolution	1 μA at FS for 20 mA range; 1 μV at FS for ± 10 mV range; 10 μV at FS for ± 100 mV range; 100 μV at FS for ± 1 V range; 1 mV at FS for ± 10 V range; 0.1 $^\circ\text{C}$ for Pt100 RTD; 0.1 $^\circ\text{C}$ for NTC thermistor; 0.1 Hz for 6000 Hz range; 0.001 mV/V at FS for ± 10 mV/V (Wheatstone bridge)
Measurement Accuracy	0.01% mV/mA FS (0.1% FS for Pt100 and NTC) - with Standard Measurement 0.13% mV/mA FS - with Max Speed Measurement Temperature Drift: < 10 ppm/ $^\circ\text{C}$, range -30 to 70°C Input Noise Voltage: 5.42 μV pp Input Limits : $\pm 12\text{V}$ DC Common Mode Rejection: >105 dB Normal Mode Rejection: >90 dB Input Impedance: 20 M Ω typical
Switched Output Power Supply	The voltage 'V OUT' is switched on and off under program control. V OUT is the unregulated input power supply 'V IN' (2 A)

DIGITAL I/O	
Digital Output	6 Relay output (for alarm, etc.): volt-free closure (low voltage 30V, 2A) One additional relay output controllable from Modbus TCP.
Digital Input:	Two opto-isolated digital inputs Max Input Voltage: 24V (max current: 10mA) Min Input Voltage: 5V (max current: 2mA) Measurement Rate (MR): max frequency 1 kHz Accuracy: 0.1 Hz 6 Additional Digital Input available as trigger for acquisition and alarms.
PROTECTIONS	
	Electro-Mechanical Relays for Measuring Each Channel: Electrical Endurance: min 2 x 10 ⁵ operations Mechanical Endurance: 100 x 10 ⁶ operations. Circuit Protection (Gas Discharge Tubes): DC Breakdown Voltage (@100V/s): 75V Tolerance of DCBV: ± 20% Impulse Breakdown Voltage (@100v/μs): 250V Impulse Breakdown Voltage (@1kv/μs): 525V Overvoltage and Reverse Polarity Protection Short Circuit Protection on Every Output

INTERFACES

Display & Keyboard

Small backlight graphic LCD 128 x 64 dpi with membrane keyboard for the minimal local management without the PC. Keyboard for starting a data acquisition scan, sequential display of the last stored readings for each channel (sensor ID, converted unit reading, unit of measure), device status, data download and firmware/Web pages update by USB pen drive, safe mode (back-up/format/restore internal SD card).

LAN Ethernet Isolated

10/100 Mbps, RJ45

RS232

9-pin, DE9: DCE port for optional GSM/GPRS modem connection
 Baud Rates: selectable from 9600 bps to 115.2 kbps
 Default Format: 8 data bits; 1 stop bits; no parity

USB

USB 2.0 pen drive only (FAT 32), 5 V 200 mA

RS485#1 Opto-Isolated

Connection: 5 screw clamp port for max. No.254 Modbus RS485 digital bus sensors
 Communication Interface: RS485
 Communication Protocol: MODBUS RTU
 Voltage 'V OUT': Switched on and off under program control. V OUT is the unregulated input power supply 'V IN' (1 A).
 Power supply management: Always on or energy safe

SOFTWARE & FIRMWARE

- Web server on board (independent OS platform)
- Acquisition Time Interval: selectable from 1 second up to 1 week (depends on the number of channels acquired)
- FTP client to send data/alerts on an FTP server (SFTP not supported)
- MAIL to send data/alerts to max 5 email address (SMTPS / SSL not supported)
- SMS to send alerts to max 5 telephone numbers
- Data download (readings, logs) in .csv file (compatible with Microsoft Excel)
- Virtual channels management
- Languages: Italian, English and French


SYSTEM POWER REQUIREMENTS

Voltage (External Power Supply)	10 to 30 Vdc (reverse polarity protected)
External Rechargeable Batteries	12 Vdc nominal
Typical Current Drain (@12 Vdc, External Power Supply)	Sleep Mode(MAX): 315 μ A ON: 62 mA - ON with ethernet connected: 87 mA - ON with display ON: 115 mA ON with display ON and ethernet connected: 142 mA
Analog Initialization	115 mA
Measurement	123 mA (with 12 mA @ 24 V sensor consumption)

ENVIROMENTAL CONDITIONS

Operating Temperature	-30 to 70°C (display -20 to 70°C)
Storage Temperature	-40 to 85°C (display -30 to 80°C)
Relative Humidity	80 %RH
Overtoltage Category	II
Pollution Degree	2
Sound Levels	< 74 dBA
Maximum Height of Use	3000 m (9800 ft)

NI2400/NI816/NI4866 DATALOGGER

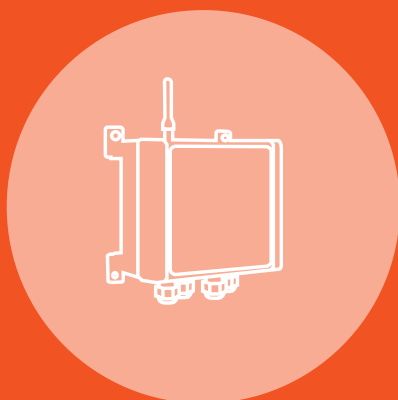

DATALOGGERS



**INTERNET OF THINGS
SENSORS**



WEB SOFTWARE



Next Industries S.r.L
Via G. Di Vittorio 2/F,
20065 Inzago (MI) - Italy

T+39 02.95764356
info@ruggedaq.com
www.ruggedaq.com